









Orlimex CZ s.r.o. Osík 50 56967 Osík 00420 731 416 285 Alexander Bobryshev www.orlimex.cz



PRODUCT

Basalt Fibre Reinforced Polymer Rebar, 8mm



DECLARED UNIT/FUNCTIONAL UNIT

The production of 1 kilogram of product for use as BFRP mesh



DESCRIPTION OF PRODUCT

Basalt Fibre Reinforced Polymer (BFRP) mesh serves as an adequate replacement of reinforcement steel mesh used in concrete constructions.





MRPI® REGISTRATION 1.1.00388.2022

DATE OF ISSUE 05-12-2022

EXPIRY DATE 05-12-2027



SCOPE OF DECLARATION





This MRPI®-EPD certificate is verified by Anne Kees Jeeninga, Advieslab v.o.f.. The LCA study has been done by Ruben van Gaalen, EcoReview B.V. . The certificate is based on an LCA-dossier according to ISO14025 and EN15804+A2/Bepalingsmethode. It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPDs of construction products may not be comparable if they do not comply with EN15804+A2/Bepalingsmethode. Declaration of SVHC that are listed on the 'Candidate List of Substances of Very High Concern for authorisation' when content exceeds the limits

for registration with ECHA.

PROGRAM OPERATOR

Stichting MRPI® Kingsfordweg 151 1043GR Amsterdam

DEMONSTRATION OF VERIFICATION CEN standard EN15804 serves as the core PCR[a] Independent verification of the declaration and data, according to EN ISO 14025:2010: internal: external: X Third party verifier: Anne Kees Jeeninga, Advieslab v.o.f. [a] PCR = Product Category Rules





DETAILED PRODUCT DESCRIPTION

For the production of BFRP Basalt Roving is purchased, this is basalt rock which has been crushed and melted and then put on a bundle of continues unidirectional complex basalt fibres. These basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization. This process is called pultrusion. After the pultrusion process the BFRP are being sand coated, netted and made with a diameter of 8mm. Then it's shipped to Orlimex in Czech Republic for distribution.


COMPONENT >1% of total mass	[%]
Basalt	75%
Resin	10%
Silica Sand	14%



SCOPE AND TYPE

The type of this EPD is Cradle-to-Gate (A1-A3). All major steps from the extraction of natural resources to the factory gate are included in the environmental performance of the manufacturing phase, except those that are not relevant to the environmental performance of the product. It is not determined as to how the BFRP are to be processed at the end of life (after 50 years). Therefore, this module is not considered in this LCA study.

The software Simapro is used to perform the LCA. The background databases used are: • Ecoinvent (v3.6)

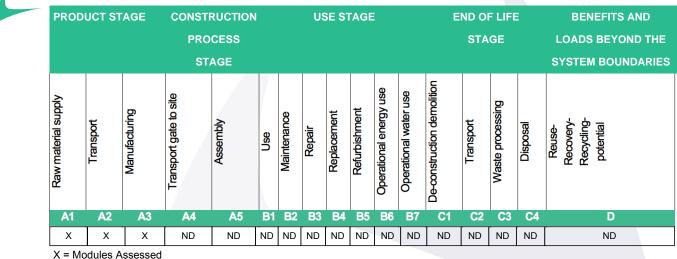


X = Modules Assesse

ND = Not Declared







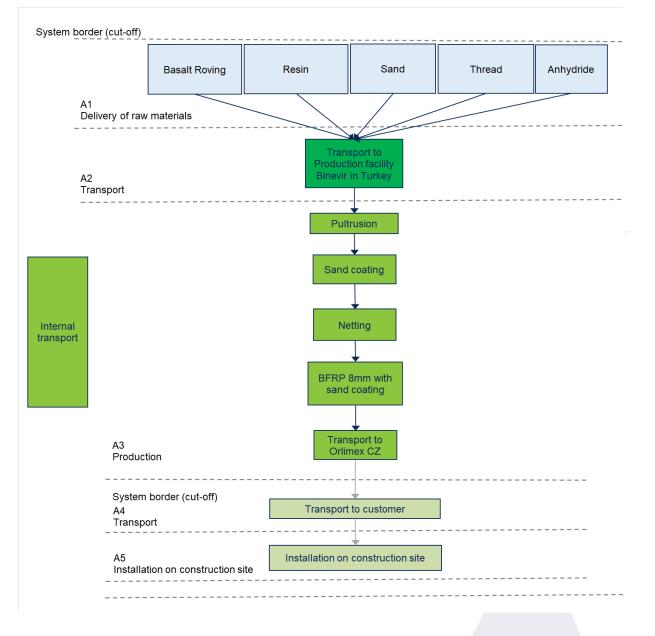

LCA process diagram according to EN 15804 (7.2.1)

REPRESENTATIVENESS

This EPD is representative for products produced and sold in the EU. The BFRP is produced in one production site of Binevir Ist Kompozit Uretim A.S. in Turkey.







ENVIRONMENTAL IMPACT per functional unit or declared unit (indicators A1)

	UNIT	A1	A2	A3	A1-A3
ADPE	kg Sb eq.	1.18E-5	7.90E-6	1.66E-6	2.14E-5
ADPF	MJ	3.41E+1	5.34E+0	5.84E+0	4.53E+1
GWP	kg CO2 eq.	1.91E+0	3.62E-1	4.20E-1	2.69E+0
ODP	kg CFC11 eq.	2.12E-7	6.30E-8	1.05E-8	2.85E-7
POCP	kg ethene eq.	8.47E-4	2.73E-4	2.77E-4	1.40E-3
AP	kg SO2 eq.	4.55E-3	3.23E-3	2.17E-3	9.96E-3
EP	kg (PO4)3- eq.	7.34E-4	4.64E-4	2.50E-4	1.45E-3

Toxicity indicators for Dutch market

HTP	kg DCB eq.	8.72E-1 1.63E-1		1.91E-1	1.23E+0
FAETP	kg DCB eq.	1.55E-1 4.22E-3		4.10E-3	1.63E-1
MAETP	kg DCB eq.	4.76E+1	1.60E+1	1.78E+1	8.13E+1
TETP	TETP kg DCB eq.		5.51E-4	2.26E-3	6.28E-3
ECI Euro		2.20E-1	5.00E-2	5.00E-2	3.20E-1
ADPF	ADPF kg Sb. eq.		2.57E-3	2.81E-3	2.18E-2

ADPE = Abiotic Depletion Potential for non-fossil resources

ADPF = Abiotic Depletion Potential for fossil resources

GWP = Global Warming Potential

ODP = Depletion potential of the stratospheric ozone layer

POCP = Formation potential of tropospheric ozone photochemical oxidants

AP = Acidification Potential of land and water

EP = Eutrophication Potential

HTP = Human Toxicity Potential

FAETP = Fresh water aquatic ecotoxicity potential

MAETP = Marine aquatic ecotoxicity potential

TETP = Terrestrial ecotoxicity potential

ECI = Environmental Cost Indicator

ADPF = Abiotic Depletion Potential for fossil resources expressed in [kg Sb-eq.]







ENVIRONMENTAL IMPACT per functional unit or declared unit (core indicators A2)

	UNIT	A1	A2	A3	A1-A3
GWP-total	kg CO2 eq.	1.96E+0	3.66E-1	4.35E-1	2.76E+0
GWP-fossil	kg CO2 eq.	1.95E+0	3.65E-1	4.28E-1	2.75E+0
GWP-biogenic	kg CO2 eq.	2.62E-3	1.11E-4	3.47E-3	6.20E-3
GWP-luluc	kg CO2 eq.	6.68E-4	1.58E-4	3.60E-3	4.43E-3
ODP	kg CFC11 eq.	2.23E-7	7.91E-8	1.24E-8	3.15E-7
AP	mol H+ eq.	5.51E-3	4.14E-3	2.56E-3	1.22E-2
EP-freshwater	kg PO4 eq.	6.24E-5	3.23E-6	4.30E-5	1.09E-4
EP-marine	kg N eq.	1.01E-3	1.20E-3	4.60E-4	2.66E-3
EP-terrestrial	restrial mol N eq.		1.32E-2	3.95E-3	2.85E-2
POCP	POCP kg NMVOC eq.		3.60E-3	1.64E-3	9.38E-3
ADP-minerals & metals	kg Sb eq.	1.18E-5	7.90E-6	1.66E-6	2.14E-5
ADP-fossil	MJ, net calorific value	3.17E+1	5.34E+0	4.34E+0	4.14E+1
WDP	m3 world eq. deprived	3.64E-1	1.70E-2	1.78E-1	5.59E-1

GWP-total = Global Warming Potential total

GWP-fossil = Global Warming Potential fossil fuels

GWP-biogenic = Global Warming Potential biogenic

GWP-luluc = Global Warming Potential land use and land use change

ODP = Depletion potential of the stratospheric ozone layer

AP = Acidification Potential, Accumulated Exceedence

EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment

EP-marine = Eutrophication Potential, fraction of nutrients reaching marine end compartment

EP-terrestrial = Eutrophication Potential, Accumulated Exceedence

POCP = Formation potential of tropospheric ozone photochemical oxidants

ADP-minerals&metals = Abiotic Depletion Potential for non fossil resources [2]

ADP-fossil = Abiotic Depletion for fossil resources potential [2]

WDP = Water (user) deprivation potential, deprivation-weighted water consumption [2]

Disclaimer [2]

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.







ENVIRONMENTAL IMPACT per functional unit or declared unit (additional indicators A2)

	UNIT	A1	A2	А3	A1-A3
PM	Disease incidence	3.50E-8	2.83E-8	3.22E-8	9.55E-8
IRP	kBq U235 eq.	7.54E-2	2.25E-2	2.38E-3	1.00E-1
ETP-fw	CTUe	3.55E+1	4.52E+0	4.22E+0	4.43E+1
HTP-c	CTUh	1.11E-9	1.69E-10	3.33E-10	1.61E-9
HTP-nc	CTUh	1.33E-8	4.76E-9	3.94E-9	2.20E-8
SQP		5.76E+0	3.92E+0	2.60E-1	9.94E+0

PM = Potential incidence of disease due to PM emissions

IRP = Potential Human exposure efficiency relative to U235 [1]

ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]

HTP-c = Potential Comparative Toxic Unit for humans [2]

HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]

SQP = Potential soil quality index [2]

Disclaimer [1]

- This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer [2]

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.







RESOURCE USE per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3
PERE	MJ	0.00	0.00	0.00	0.00
PERM	MJ	0.00	0.00	0.00	0.00
PERT	MJ	1.06E+0	6.12E-2	1.01E+0	2.14E+0
PENRE	MJ	0.00	0.00	0.00	0.00
PENRM	MJ	0.00	0.00	0.00	0.00
PENRT	MJ	3.45E+1	5.66E+0	4.76E+0	4.49E+1
SM	kg	0.00	0.00	0.00	0.00
RSF	MJ	0.00	0.00	0.00	0.00
NRSF	MJ	0.00	0.00	0.00	0.00
FW	m3	1.04E-2	5.82E-4	3.52E-3	1.45E-2

PERE = Use of renewable energy excluding renewable primary energy resources

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non renewable secondary fuels

FW = Use of net fresh water

OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3
HWD	kg	2.80E-5	1.20E-5	2.23E-6	4.22E-5
NHWD	kg	8.61E-2	2.79E-1	2.27E-2	3.88E-1
RWD	kg	5.09E-5	3.54E-5	2.21E-6	8.85E-5
CRU	kg	0.00	0.00	0.00	0.00
MFR	kg	0.00	0.00	0.00	0.00
MER	kg	0.00	0.00	0.00	0.00
EEE	MJ	0.00	0.00	0.00	0.00
ETE	MJ	0.00	0.00	0.00	0.00

HWD = Hazardous Waste Disposed RWD = Radioactive Waste Disposed

MFR = Materials for recycling

EEE = Exported Electrical Energy

NHWD = Non Hazardous Waste Disposed CRU = Components for reuse MER = Materials for energy recovery ETE = Exported Thermal Energy







BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 / A2)

	UNIT	A1	A2	A3	A1-A3
BCCpr	kg C	0.00	0.00	0.00	0.00
ВССра	kg C	0.00	0.00	0.00	0.00

BCCpr = Biogenic carbon content in product BCCpa = Biogenic carbon content in packaging



CALCULATION RULES

Data quality

Data flows have been modeled as realistically as possible. Data quality assessment is based on the principle that the primary data used for processes occurring at the production site is selected in the first instance. Where this is not available, other reference data is selected from appropriate sources.

Data collection period

The dataset is representative for the production processes used in 2020

Methodology and reproducibility

The process descriptions and quantities in this study are reproducible in accordance to the reference standards that have been used. The references of all sources, both primary and public sources and literature, have been documented. In addition, to facilitate the reproducibility of this LCA, a full set of data records has been generated. This data portfolio contains a summary of all the data used in this LCA.

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

A1. Raw materials supply

This module considers all suppliers including the melting, crushing and processing of basalt roving by supplier to Binevir.

A2. Transport of raw materials to manufacturer

This includes the transport distance of the raw material to the manufacturing facility via road, boat and/or train.

A3. Manufacturing

This module covers the manufacturing of the BFRP and includes all processes linked to production such as pultrusion, this is the process where basalt roving are pulled through a bath of resin to impregnate them after which it's heated and dyed to finally undergo polymerization.

Use of electricity and natural gas have been taken into account. The transport from Binevir production facility to Orlimex in Czech Republic is included in A3. Is produced and certified in accordance with EN ISO/IEC 17067 standard.







DECLARATION OF SVHC

None of the substances contained in the product are listed in the "Candidate List of Substances of Very High Concern for authorisation", or they do not exceed the threshold with the European Chemicals Agency.

REFERENCES

 CML - Department of Industrial Ecology, CML-IA Characterisation Factors, Dated August 2016, Leiden University, Leiden, Netherlands Available at: https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors
Simapro 9.1.1.1

• EN 15804: Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products', I.S. EN 15804:2012+A1:2013 and EN 15804+A2:2019.

• ISO 14040: Environmental management - Life cycle assessment – Principles and Framework', International Organization for Standardization, ISO14040:2006.

• ISO 14044: Environmental management - Life cycle assessment - Requirements and guidelines', International Organization for Standardization, ISO14044:2006.

• ISO 14025: Environmental labels and declarations -- Type III environmental declarations -- Principles and procedures', International Organization for Standardization, ISO14025:2006.

• NEN-EN 15804+A2 and NMD Bepalingsmethode Milieuprestatie en bouwwerken 1.0

REMARKS None

